

# Model 2646ES

## SCISSOR LIFTS

### Performance

• Working Height	9.92 m
• Platform Height – Elevated	7.92 m
A. Stowed Height	2.39 m
B. Platform Railing Height	1.10 m
C. Stowed Height (Rails Folded) <sup>1</sup>	2.01 m
D. Platform Size (W x L)	1.12 m x 2.50 m
E. Deck Extension	1.27 m
F. Overall Width	1.17 m
G. Overall Length	2.50 m
H. Wheelbase	2.09 m
I. Ground Clearance	0.13 m
• Platform Capacity <sup>2</sup>	450 kg
• Capacity on Optional Deck Extension	120 kg
• Lift/Lower Time	40/50 sec.
• Maximum Drive Height	7.92 m
• Machine weight <sup>3</sup>	2,740 kg
• Maximum Ground Bearing Pressure	6.98 kg/cm <sup>2</sup>
• Drive Speed – Lowered	4.0 km/h
• Gradeability	25%
• Turning Radius – Inside	Zero
• Turning Radius – Outside	2.41 m




<sup>1</sup> Folding rails standard on all ES models in CE spec.

<sup>2</sup> Capacities shown are maximum with 2 persons indoor on all models. Outdoor ratings are:

1930ES – 1 person / 120 kg; 2030ES – 1 person / 160 kg;

<sup>3</sup> Certain options or country standards may increase weight and/or dimensions.

### Dimensions

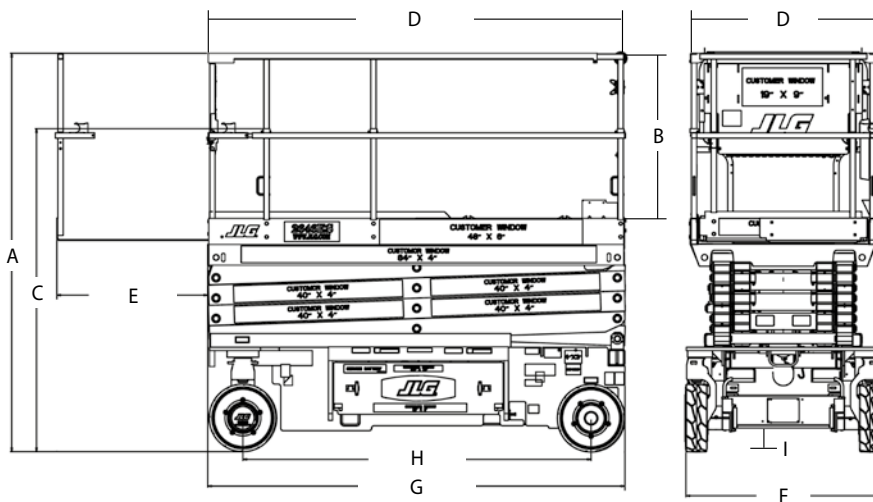

### IMPORTANT

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification.



### JLG EMEA BV

Polaris Avenue 63  
2132 JH Hoofddorp  
The Netherlands  
Tel: +31 (0)23 565 5665  
Fax: +31 (0)23 557 3750  
[www.jlg.com](http://www.jlg.com)

An Oshkosh Corporation Company