
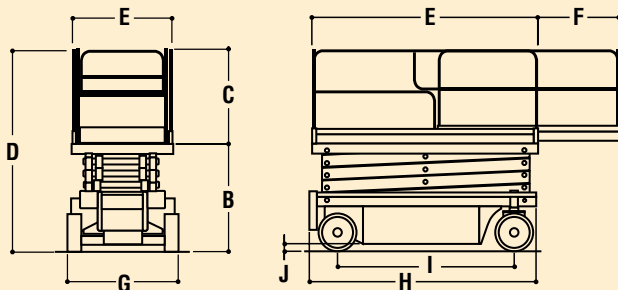


2646E3

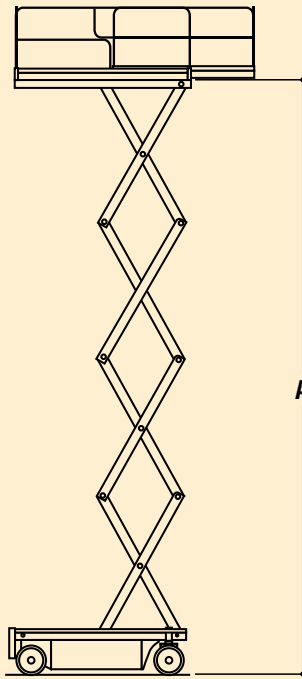

DIMENSIONAL DATA

A. Platform Height—Elevated	26 ft. (7.92 m)
B. Platform Height—Lowered	3 ft. 9 in. (1.14 m)
C. Platform Railing Height*	3 ft. 7.5 in. (1.1 m)
D. Overall Height	7 ft. 4 in. (2.24 m)
Overall Height with Rails Folded	6 ft. 2.5 in. (1.89 m)
E. Platform Size	42 x 94 in. (1.07 x 2.39 m)
F. Platform Extension	3 ft. (91 cm)
G. Overall Width	3 ft. 10 in. (1.17 m)
H. Overall Length	8 ft. 3 in. (2.51 m)
I. Wheelbase	6 ft. 1 in. (1.85 m)
J. Ground Clearance	3.5 in. (9.0 cm)
Platform Capacity	750 lbs. (340 kg)
Capacity on Deck Extension	250 lbs. (113 kg)
Lift/Lower Speed	50/32 seconds
Maximum Drive Height	Full Height
Gross Vehicle Weight**	4,370 lbs. (1,982 kg)

CHASSIS

Drive Speed—Lowered	2.25 mph (3.62 kph)
Drive Speed—Elevated	0.5 mph (0.8 kph)
Gradeability	25%
Turning Radius (Inside)	16 in. (41 cm)
Turning Radius (Outside)	95 in. (2.41 m)
Tire Size/Type	16 x 5 Non-Marking Solid
Brakes	Automatic Rear Wheel Parking



POWER SYSTEM

Batteries	4 x 6V, 220 amp-hr
Charger	Automatic 24V DC
Electric Motor	4.5 hp (3.4 kW) Series Wound
Pump	Single Section Gear
Hydraulic Reservoir	4.0 gal. (15.2 L)

*Special heights available, consult factory.

**Certain options or country standards will increase weight.

2658E3

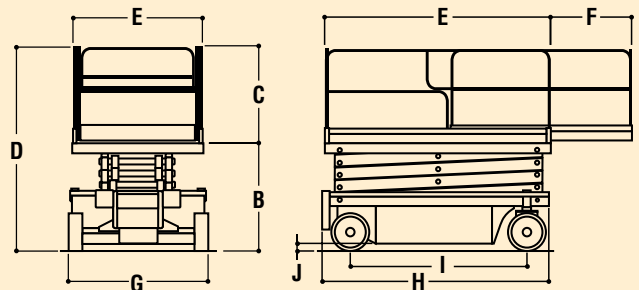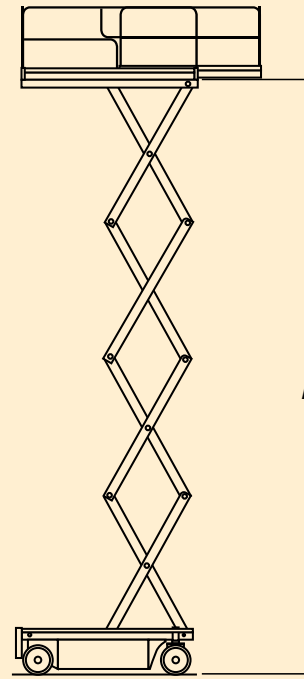

DIMENSIONAL DATA

A. Platform Height—Elevated	26 ft. (7.92 m)
B. Platform Height—Lowered	3 ft. 9 in. (1.14 m)
C. Platform Railing Height*	3 ft. 7.5 in. (1.1 m)
D. Overall Height	7 ft. 4 in. (2.24 m)
Overall Height with Rails Folded	6 ft. 2.5 in. (1.89 m)
E. Platform Size	54 x 94 in. (1.37 x 2.39 m)
F. Platform Extension	3 ft. (91 cm)
G. Overall Width	4 ft. 10 in. (1.47 m)
H. Overall Length	8 ft. 3 in. (2.51 m)
I. Wheelbase	6 ft. 1 in. (1.85 m)
J. Ground Clearance	3.5 in. (9.0 cm)
Platform Capacity	1,000 lbs. (450 kg)
Capacity on Deck Extension	250 lbs. (113 kg)
Lift/Lower Speed	51/33 seconds
Maximum Drive Height	Full Height
Gross Vehicle Weight**	4,680 lbs. (2,123 kg)

CHASSIS

Drive Speed—Lowered	2.25 mph (3.62 kph)
Drive Speed—Elevated	0.5 mph (0.8 kph)
Gradeability	25%
Turning Radius (Inside)	16 in. (41 cm)
Turning Radius (Outside)	100 in. (2.54 m)
Tire Size/Type	16 x 5 Non-Marking Solid
Brakes	Automatic Rear Wheel Parking

POWER SYSTEM

Batteries	4 x 6V, 220 amp-hr
Charger	Automatic 24V DC
Electric Motor	4.5 hp (3.4 kW) Series Wound
Pump	Single Section Gear
Hydraulic Reservoir	4.0 gal. (15.2 L)

*Special heights available, consult factory.

**Certain options or country standards will increase weight.